

INSTALLATION

The Luxium™ ZOBO is a PAR30 size dimmable LED lamp with 6-ch. additive color mixing and Bluetooth control.

It has a wide input power supply, so will operate on any voltage that you're likely to find on an E26/E27 "medium screw base" lamp socket.

If installed in a fixture please leave at least ½ inch (12mm) of clear space surrounding the ZOBO housing to facilitate air flow.

Optional diffuser lenses are installed on the front of the lamp and held in place by small tabs around the rim.



LAMP PAIRING

To control the ZOBO Bluetooth LED lamp it is necessary to first install the 'Luxium' mobile app for Apple iOS devices, available from the app store.

Here's how to pair lamps with the Luxium app.

1. Turn on your ZOBO lamp and be sure to stay near the lamp to ensure good wireless transmission during the setup. Range for Bluetooth is 30 feet.

2. Go to the Groups page to pair with a lamp.

3. Touch the SCAN+SETUP button.

4. The Connect page will be displayed. The app will search for lamps in the area and show a device code for any ungrouped lamps in the area.



LAMP GROUPING

1. Touch on the displayed code number of the lamp to assign it to a group.


2. The group name can be edited to your choice once it has been created.

3. Multiple lamps can be added to a group or new groups can be created for additional lamps.

Bluetooth can control up to 8 lamps at once and many groups are possible. Lamps can also be removed from a group and assigned to other groups using the edit function.

After a lamp has been assigned to a group you can navigate to the control page by touching on the group name button.

COLOR WHEEL MODE

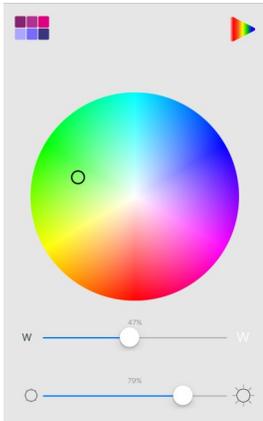


The color wheel allows the user to select any hue just by moving the small target circle to the chosen color region.

A slider bar is available for dimming the overall light output level from 100% to 0%.

The second slider bar is used to add white to the color if a pastel is desired.

The top left corner contains a navigation button for the Direct Selection page. The top right corner has a button for Sequence Mode.

DIRECT SELECTION MODE

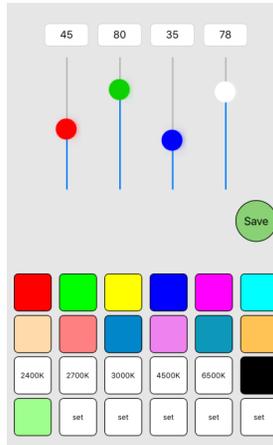


The Direct page shows two ways to select colors.

At the top are slider bars with level indicators for Red, Green, Blue and White components. By adjusting these sliders a custom blended color setting can be created.

A custom color can be saved to a Set button in the bottom row for future recall or Saved as a power-on color.

At the bottom are pre-defined color points as well as different calibrated CCT's which are selected by touching the desired button.

COLOR SEQUENCE MODE

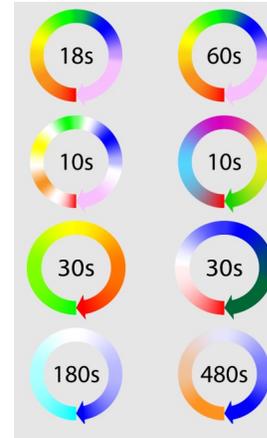

The Sequences page has pre-defined selections for a number of different automatic colored light sequences.

Color and duration are represented on the circle icon buttons.

Each sequence repeats a series of colors until another sequence or mode is chosen.

It may be necessary to return to the group page

when leaving the sequence page so that the correct lamp group will be controlled. from the other app modes.

Download the Luxium app.



ZOBO



**Full-Color LED
Bluetooth® Lamp**



Scan for new
Lamps



Power ON and Connect to the Lamp



Add the Lamps
to a group



IN THE BOX:

- One ZOBO- Z2 or Z1 LED Spot Light
- One Medium Flood Diffuser

REQUIRES:

Free Luxium mobile app available for iPhone or Android devices

For warranty information please visit:
www.luxium.co/warranty

MADE IN USA

Phone: 503.780.4306
E-mail: info@luxium.co

7624SE 7th Ave.
Portland, OR 97202

Luxium Lighting LLC

Input Voltage: 85 - 264VAC, 60 – 50HZ
or 100 - 370VDC
Z2 Power: 24W (at maximum output)
Z1 Power: 14W (at maximum output)
Environmental: 5C ... 45C, 10-90%RH
non-condensing. IP20

WARNING: The ZOBO is powered by a switching power supply and is not intended to be dimmed by a line-voltage dimmer. Socket should be wired directly to the power-line mains.

See full product specifications at:
www.luxium.co

Complies with: FCC, UL, cUL, ROHS, CE
Specifications subject to change without notice